

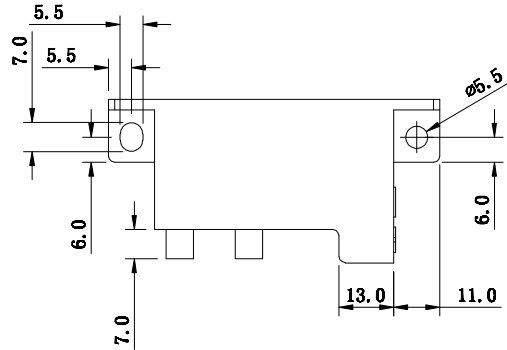

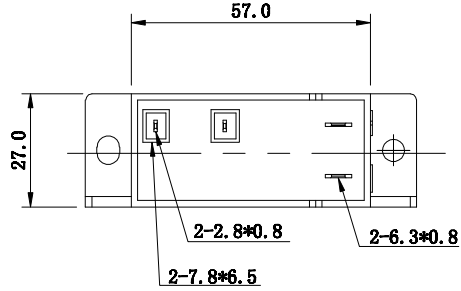


This Drawing Is Owned by J&V Electronic Science and Technology Co., Ltd., and the Use or Reproduction of All or Part of the Drawing Must Be Approved in Writing by J&V Electronic Science and Technology Co., Ltd.  
 此圖紙為創威電子科技有限公司所擁有，所有或部份圖紙使用或复制必須經創威電子科技有限公司書面同意。

版次 Version	AO	物料编号 Drawing No
---------------	----	--------------------

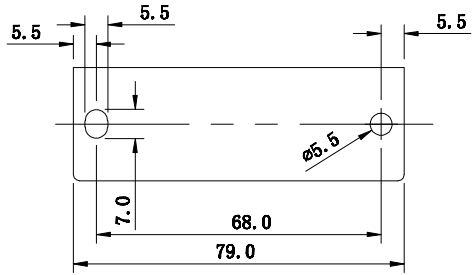

**Product Description:**  
 1、Working Voltage: AC3-240V/DC1.5-24V  
 2、Output Current:  $\geq 12KV$   
 3、Working Current:  $< 300mA$   
 4、Discharge Frequency: 6~12 Hz  
 5、High Voltage Output Terminal: 2 (2.8\*0.8)  
 6、Discharge Distance: 4.0~5.5mm:  
 (Length of Ignition Line  $\leq 1.8m$ )  
 7、Working Environment Temperature:  
 -20°C~105°C  
 8、Working Environment Humidity:  $< 95\%$   
 9、Service Life:  $> 35000$  times

**Material:**  
 1、Housing: PP inflaming retarding 120 ° black  
 2、Black glue: Epoxy sealant  
 3、Terminal: tin-plated brass terminals.

					产品型号 Model No	58-L302	图纸编号 Drawing No		数量 Quantity		材质 Material
标记 Mark	更改前 Before Change	更改后 After Change	签名 Signature	日期 Date	制图/日期 Drawing/Date		规格 Specifications		零件名称 Parts Name		表面处理 Surface Transaction
尺寸普通公差 Dimension Tolerance		投影方向 Projection Direction			校对/日期 Collation/Date	<b>J&amp;V</b> Electronic Science & Technology Co., Ltd					
		角度公差 Angle Tolerance	± 1°		审核/日期 Verifyfing/Date						